



HIGH PRESSURE DOUBLE UNION HSBV-501



Features & Specifications

- » Suitable for water borne paint applications
- » Full port flow with self-contained center section
- » 3-pc lug style body design for easy inline inspection and repair
- » Mounting pad
- » Investment cast 316 stainless steel construction
- » Blowout proof, bottom entry stem design
- » 2000 PSI WOG working pressure
- » ½"-2" sizes available

Item	Part (Qty)	Material
1	Body	CF8M/316 ASTM A351
2	Union End	CF8M/316 ASTM A351
3	Union Nut	CF8M/316 ASTM A351
4	Threaded Spacer	CF8M/316 ASTM A351
5	Stem	SS 316
6	Handle Nut	SS 304
7	Washer	SS 304
8	Follower	SS 304
9	Stem Packing	Reinforced PTFE
10	Thrust Washer	Reinforced PTFE
11	Ball Seat	Reinforced PTFE
12	Solid Ball	CF8M/316 ASTM A351
13	Spacer Seal	Reinforced PTFE
14	Handle	SS 304
15	Cover	Plastic
16	End Seal	Reinforced PTFE

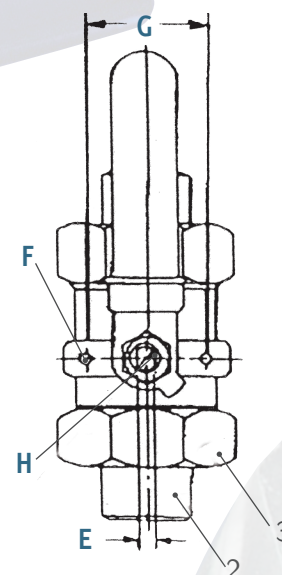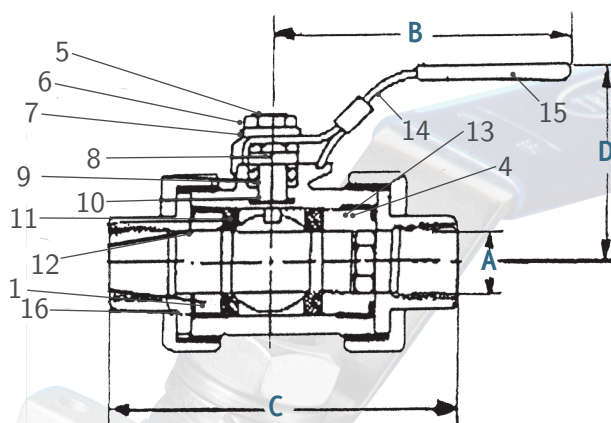

Size	A	B	C	D	E	F	G	H
¼	0.35	3.94	3.54	2.09	0.20	M4	1.13	0.31
⅜	0.49	3.94	3.54	2.09	0.20	M4	1.13	0.31
½	0.62	4.72	3.94	2.32	0.24	M5	1.42	0.37
¾	0.79	4.72	4.09	2.44	0.24	M5	1.42	0.37
1	1.00	5.71	4.80	2.87	0.31	M5	1.65	0.50
1¼	1.25	5.71	5.04	3.07	0.31	M5	1.65	0.50
1½	1.50	6.89	5.59	3.54	0.39	M6	1.97	0.63
2	2.00	6.89	6.50	3.86	0.39	M6	1.97	0.63



36