


HIGH PERFORMANCE BUTTERFLY VALVES

ORDERING GUIDELINE

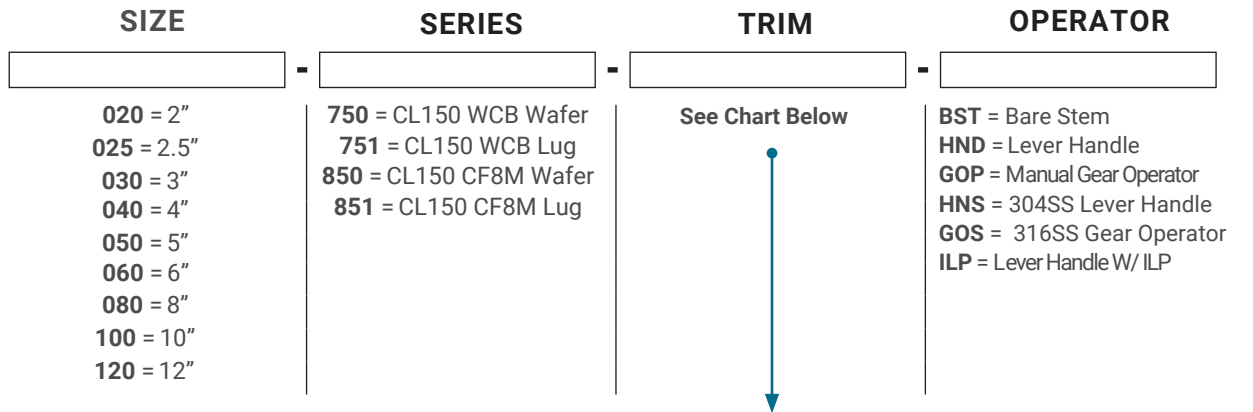

Trim Codes	Disc	Stem	Seat	Temperature Range	
821	CF8M	17-4	15% Glass RTFE	-20°F to 425°F	-29°C to 218°C
822	CF8M	316 SS	15% Glass RTFE	-20°F to 425°F	-29°C to 218°C
823	CF8M	17-4	100% Virgin PTFE	-20°F to 400°F	-29°C to 204°C
824	CF8M	316 SS	100% Virgin PTFE	-20°F to 400°F	-29°C to 204°C
825	CF8M	17-4	TFM 1600	-20°F to 500°F	-29°C to 260°C
826	CF8M	316 SS	TFM 1600	-20°F to 500°F	-29°C to 260°C
827	CF8M	17-4	Fire-Safe	-20°F to 500°F	-29°C to 260°C
828	CF8M	316 SS	Fire-Safe	-20°F to 500°F	-29°C to 260°C