



EA-402 & EA-25J-FS-300

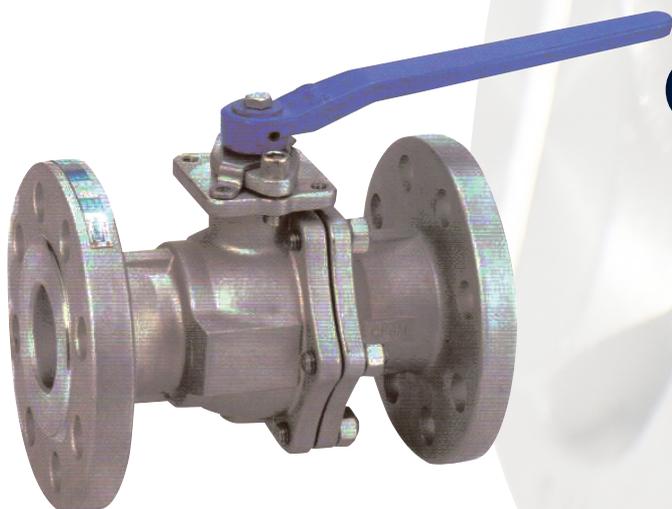

EA-25J-FS-300#

Features & Specifications

- » Investment cast stainless steel castings
- » ANSI 300 rating
- » ISO 5211 mounting pad
- » Full bore, anti-static device
- » Flange end
- » Blowout proof stem design
- » Suitable for automation
- » Standard locking handle
- » Fire-safe tested per API 607 4th edition
- » Available in ½"–6" sizes
- » 50/50 seats available for steam applications
- » V-port not available

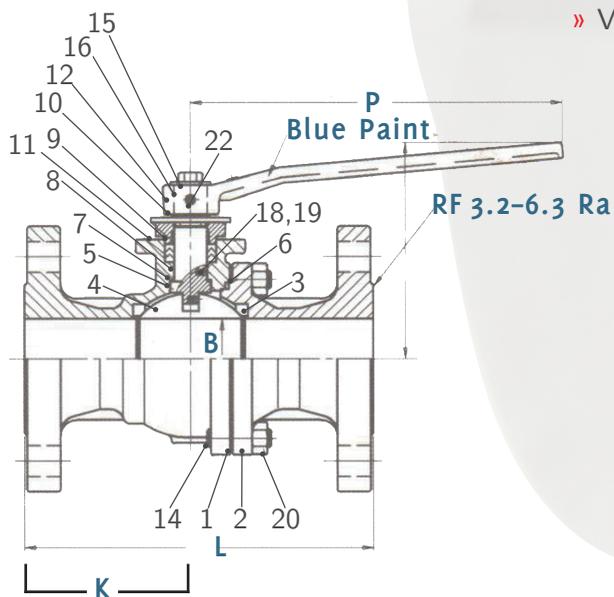

Size	NPS	B	K	L	P
½	DN15	0.63	3.28	5.51	5.32
¾	DN20	0.79	3.29	5.98	5.32
1	DN25	0.98	3.74	6.50	6.30
1½	DN40	1.50	4.79	7.48	9.06
2	DN50	1.97	5.31	8.50	9.06
3	DN80	3.15	6.13	11.14	13.78
4	DN100	3.94	7.19	12.01	15.75
5	DN125	4.92	8.08	15.00	15.75
6	DN150	5.91	10.49	15.87	31.50

Item	Part	Material	
1	Body	A351-CF8M	A216-WCB
2	Cap	A351-CF8M	A216-WCB
3	Seat	PTFE+15% G.F.	PTFE+15% G. F.
4	Ball	A351-CF8M/ SUS 316	A351-CF8/ SUS 304
5	Stem	SUS 316	SUS 304
6	Joint Gasket	PTFE/Graphite	PTFE/Graphite
7	Gasket	PTFE	PTFE
8	Seal	PTFE/Graphite	PTFE/Graphite
9	Gland Bushing	PTFE	PTFE
10	Gland Flange	A351-CF8	A351-CF8
11	Stopper	SUS 304	SUS 304
12	Handle	Ductile Iron/ Steel+Zinc plated	Ductile Iron/ Steel+Zinc plated
13	Snap Ring	Steel	Steel
14	Stud	A193-B8M	A193-B7
15	Gland Bolt	A193-B8	B193-B8
16	Flat Washer	Steel	Steel
17	Bolt	Steel	Steel
18	Static Device	SUS 304	SUS 304
19	Spring	SUS 304	SUS 304
20	Nut	A194-BM	A194-2H
21	Tag	SUS 304	SUS 304
22	Socket Screw	Steel	Steel